



# LFS


**Liquid Filtration Specialists**

LLC

P.O. Box 316 Chardon, Ohio 44024 PH:440-856-6733 Fax:440-285-8536

www.liquidfiltrationspecialists.com email: sales@liquidfiltrationspecialists.com


## GF Polyolefin Cartridge

<p><b>GENERAL USE FILTER</b></p> <p>Replaces: <b>RESIN BONDED</b></p>		
<p><b>Performance Specifications</b></p> <p><b>Micron Rating</b> 1, 3, 5, 10, 20, 25, 50, 75, 100</p> <p><b>Maximum Differential Pressure</b> Forward ..... 50 psid @ ambient temp 25 psid @ 140 degrees</p>	<p><b>Product Specifications</b></p> <p><b>Construction Material</b> Filter media.....Polyolefin</p> <p><b>Dimensions (nominal)</b> Outside diameter: 2.44 inches (62 mm) Inside Diameter: 1.18 inch (30 mm) Lengths: 9.84 in. to 40 inches (250m to 1020 mm)</p>	<p><b>GF FILTER</b></p> <p>Material : Polyolefin</p> <p><b>Features</b></p> <p><b>Structure</b> The cartridge constructed with the thermally bonded bicomponent fibers is binder-free.</p> <p><b>Advantages</b> Stable filtration accuracy High pressure resistance High flow rate - Low pressure drop No pore enlargement or falling out of filter elements Excellent chemical resistance</p>
<p><b>Purity</b> Filter Cartridges are free of Free of Surfactants, Binders, anti static agents, and Adhesives</p>		

### Ordering Information

#### PRODUCT CODING

LF- GF-1-10

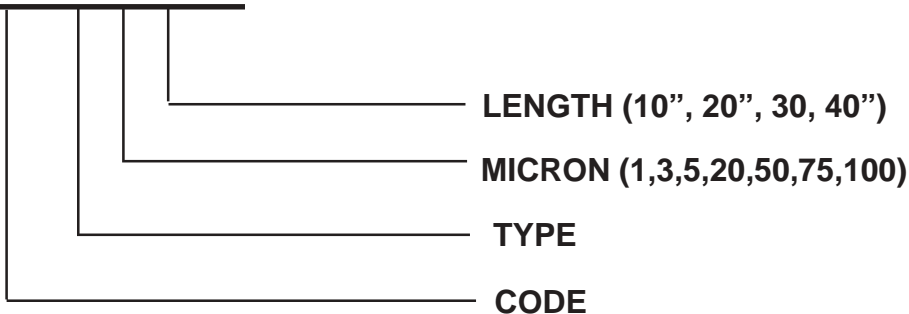

Length	Unit
10"	50
20"	25
30"	25
40"	15

P.O. Box 316 Chardon, Ohio 44024 PH:440-856-6733 Fax:440-285-8536

www.liquidfiltrationspecialists.com email: sales@liquidfiltrationspecialists.com